

GÜNTHER® BASICLINE

HOT RUNNER SYSTEMS

Reliable technology for standard applications.



Simple handling

Install, connect and get started

Our hot runner system offers maximum efficiency at an affordable price. The low hot runner height reduces the mold height and the tool opening can be used optimally.


The BasicLine systems are designed for processing simple plastics and also enable the processing of filled plastics with a filling level of up to 15 percent.

Thanks to fixed power and thermal connections, you benefit from a safe and stable electrical connection. The nozzle sizes are available in standard versions with melt channel diameters of **6 and 10 mm** and lengths of **80, 120 and 150 mm**. In addition, filled materials with a filling level of up to

15 % can be processed. The Basic2Connect system is suitable for a wide range of standard materials. The system can also withstand high temperature peaks, which are required for cleaning purposes, for example.

Your benefits:

- System nozzles with removeable heaters
- melt channel diameters of 6 and 10 mm
- nozzle lengths from 80, 120 and 150 mm
- Compact and cost saving design
- Durable and easy to maintain construction
- Processing of materials with up to 15 % filling

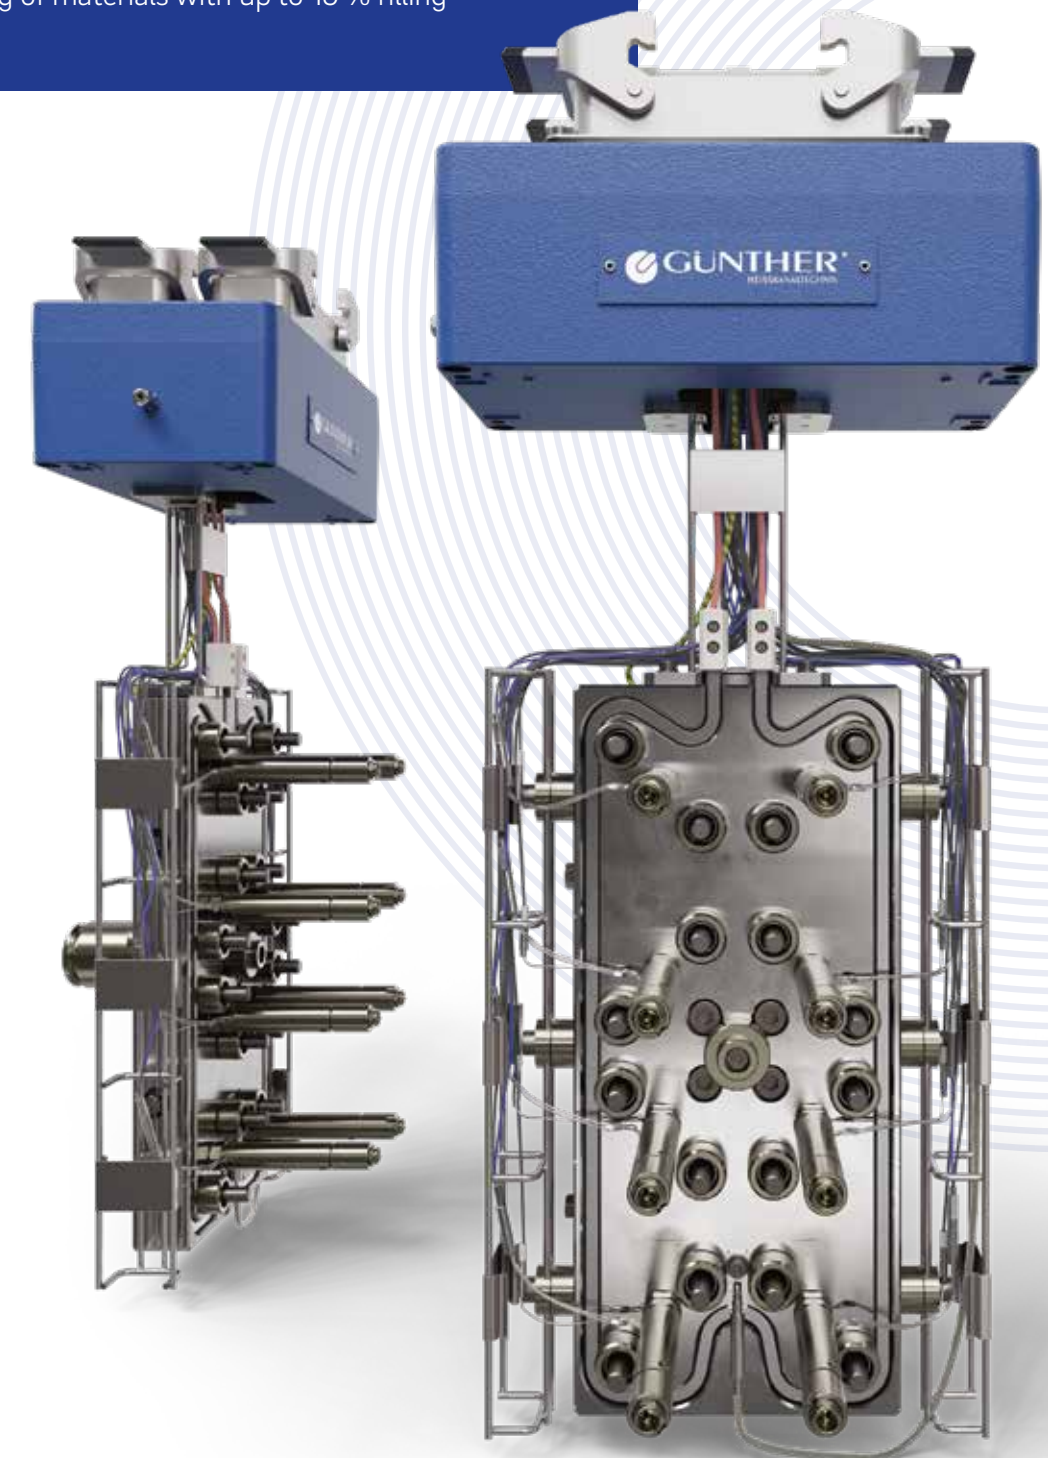

Basic2Connect system
with nozzle type 6
8-drop H-Manifold

Homogeneous melt channel temperature

Our hot runner system impresses with its homogeneous temperatures in the melt channel, which ensures uniform processing and optimum product quality. With a high level of process reliability, our BasicLine systems ensure stable and reproducible production processes - ideal for applications with plastics from the lower to middle area of the performance pyramid.


Rely on efficiency and precision in plastics processing.

We offer high-quality systems with state-of-the-art technology and maximum efficiency for applications with high requirements.




Find out more here:

www.guenther-basicline.com

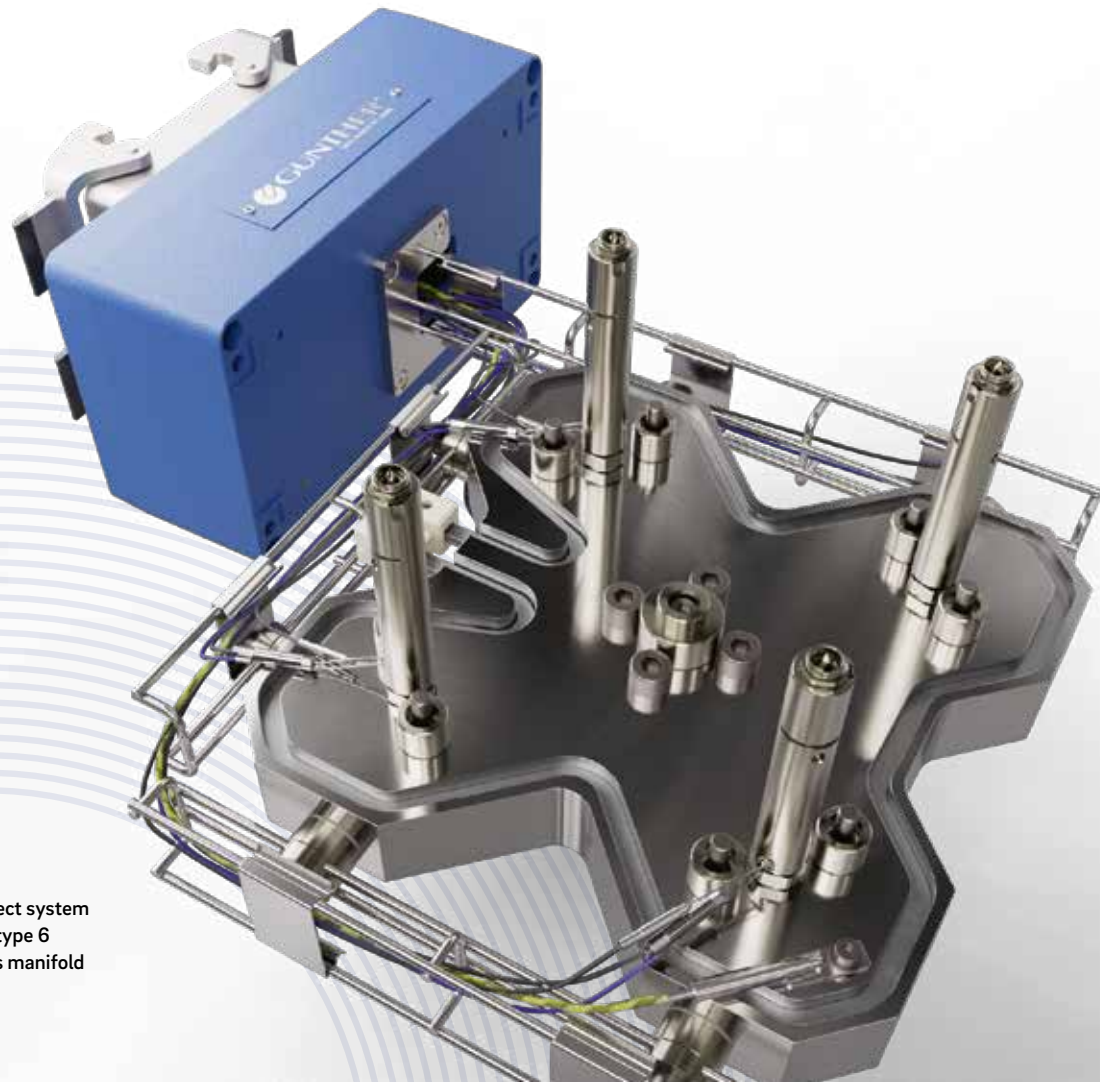



Basic2Connect system
with nozzle type 6
4-drop cross manifold

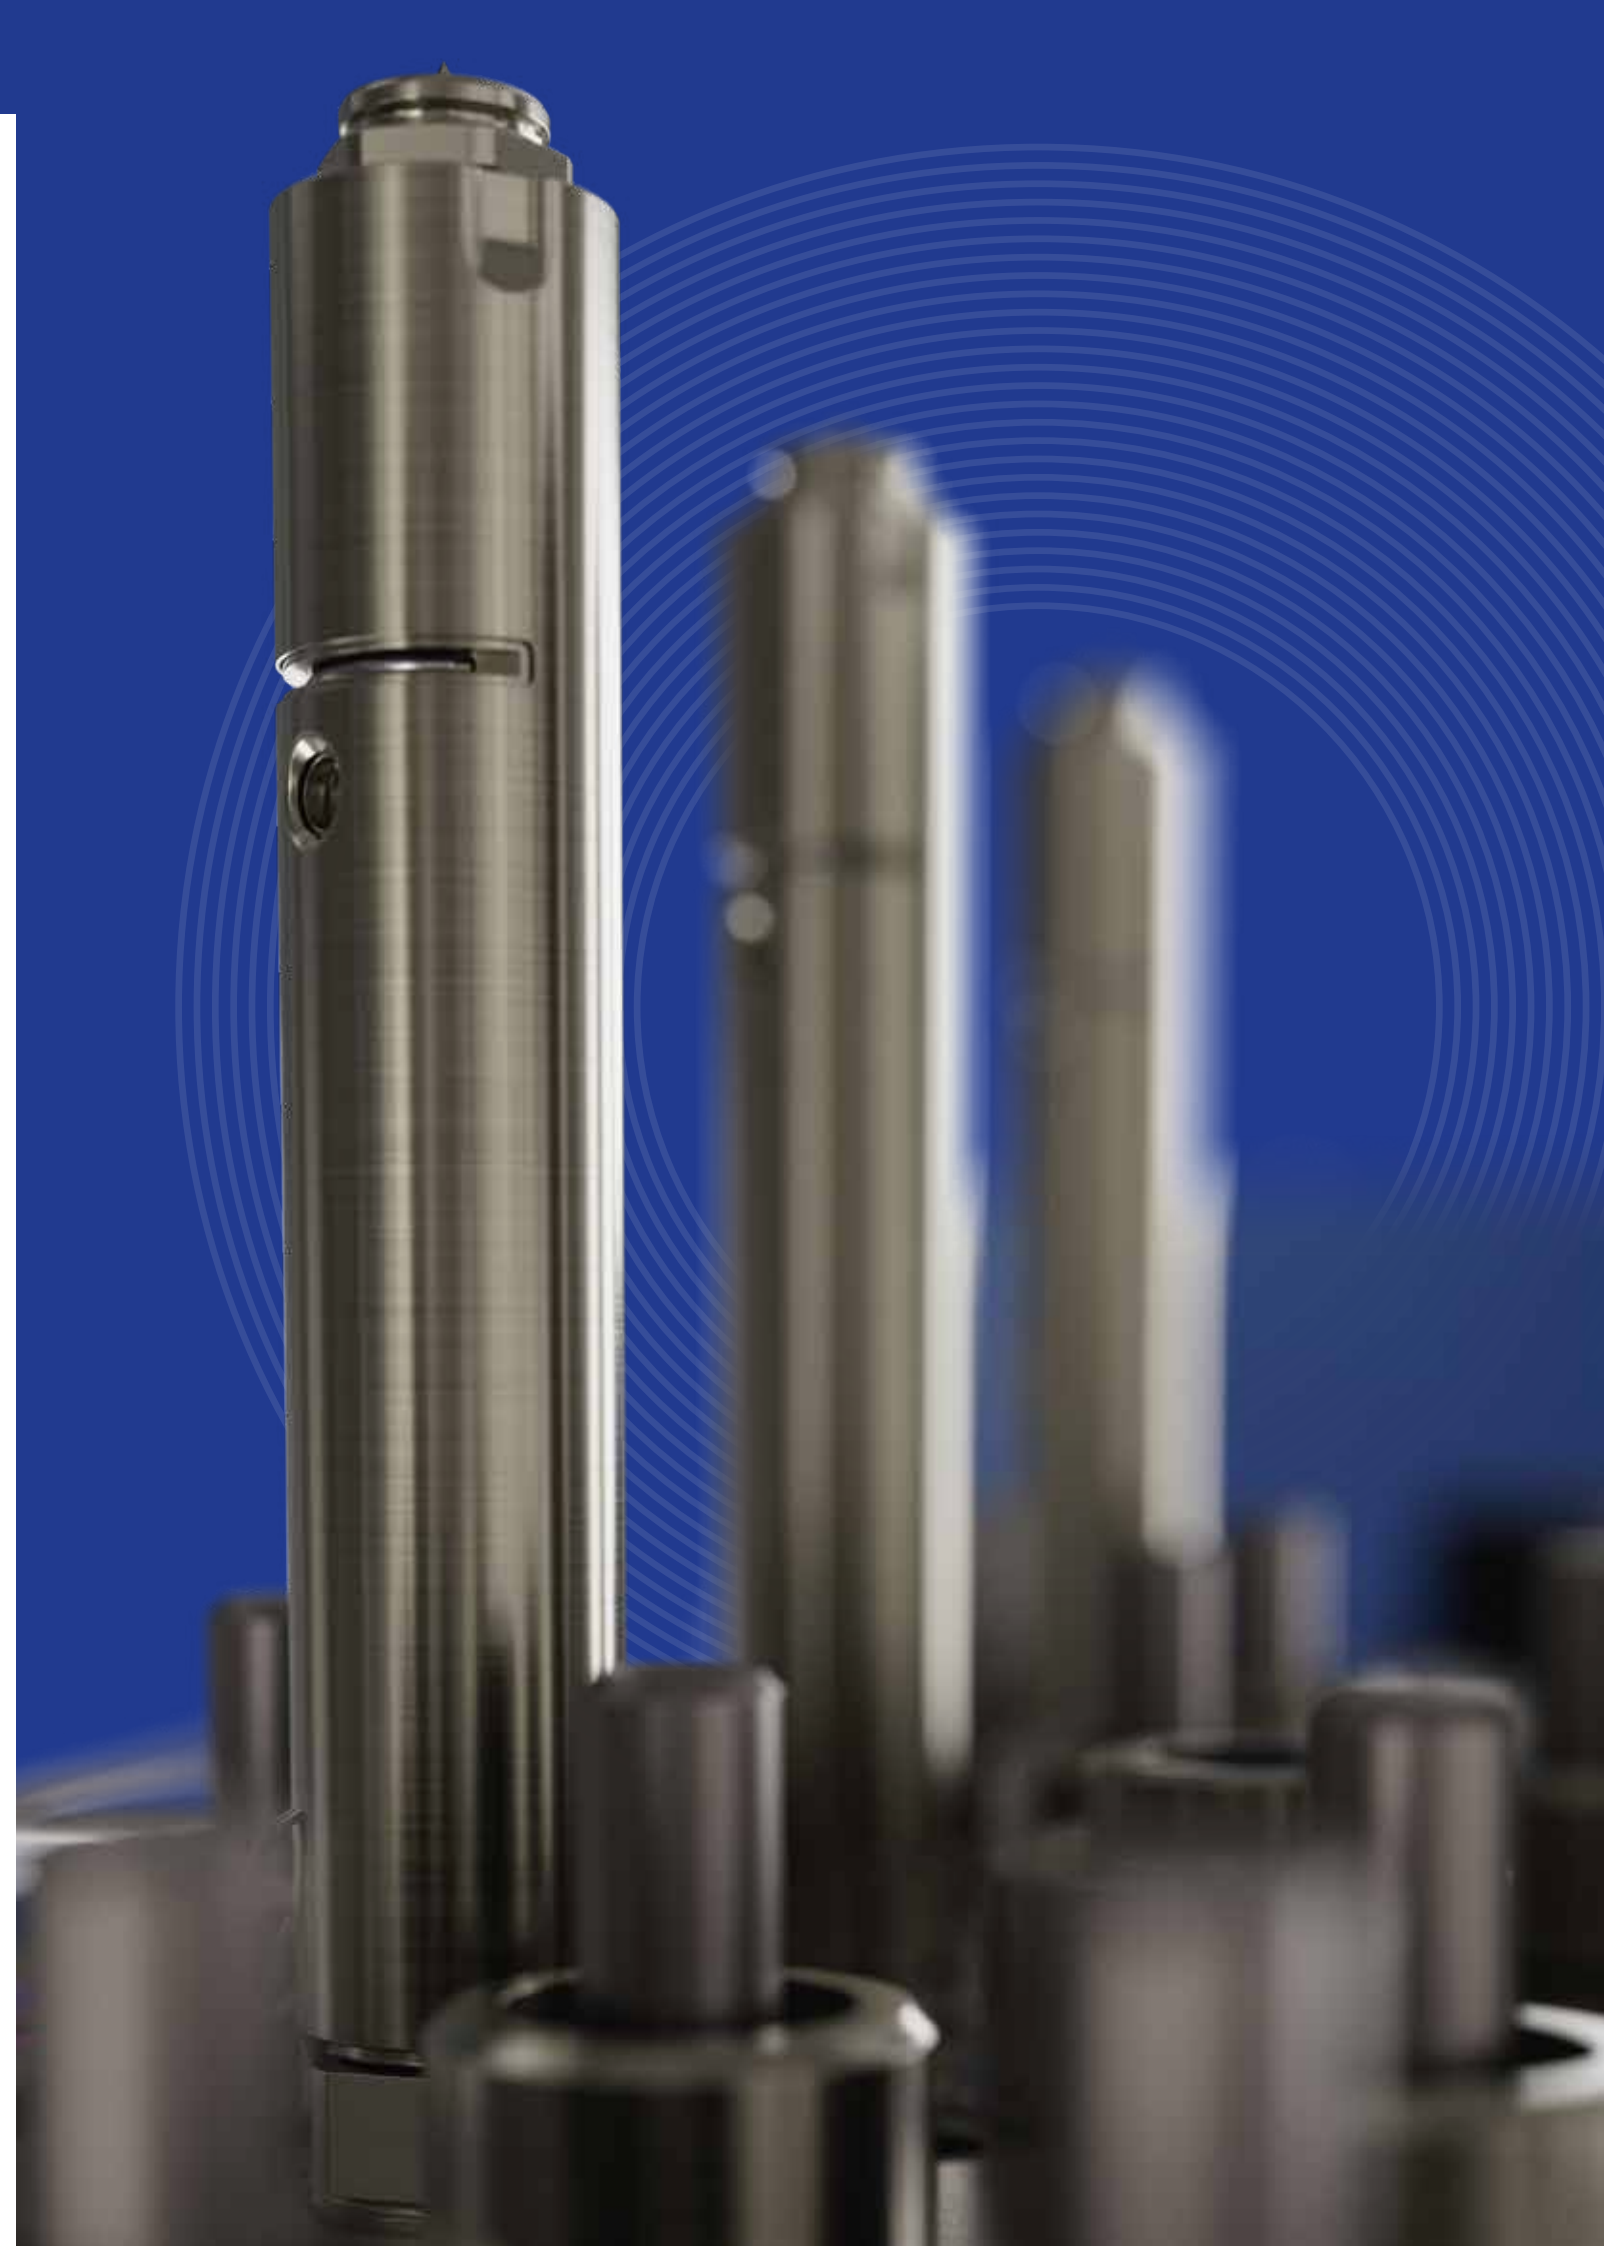

Your application at a glance

Basic2Connect is wired and ready for installation, which makes it easy to install and remove. It makes handling even more user-friendly.

“The BasicLine systems are specially designed for processing standard plastics.”

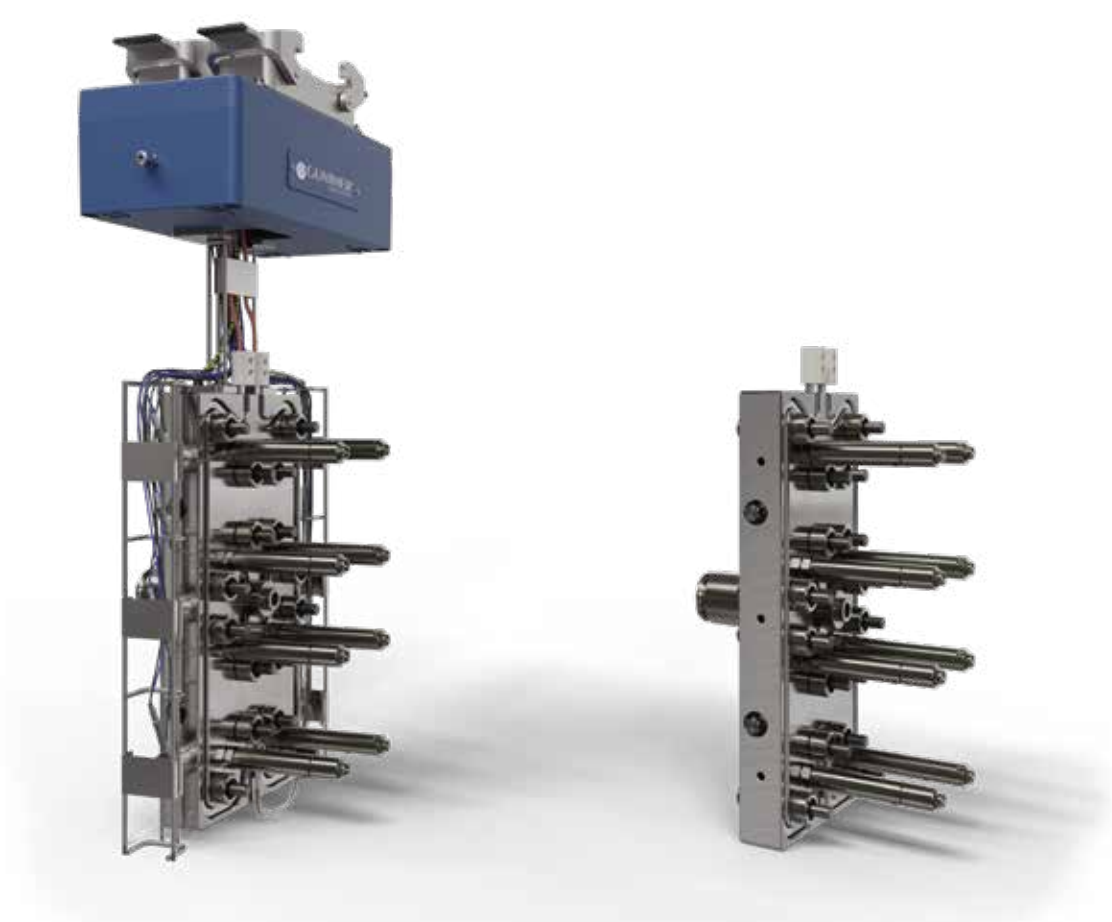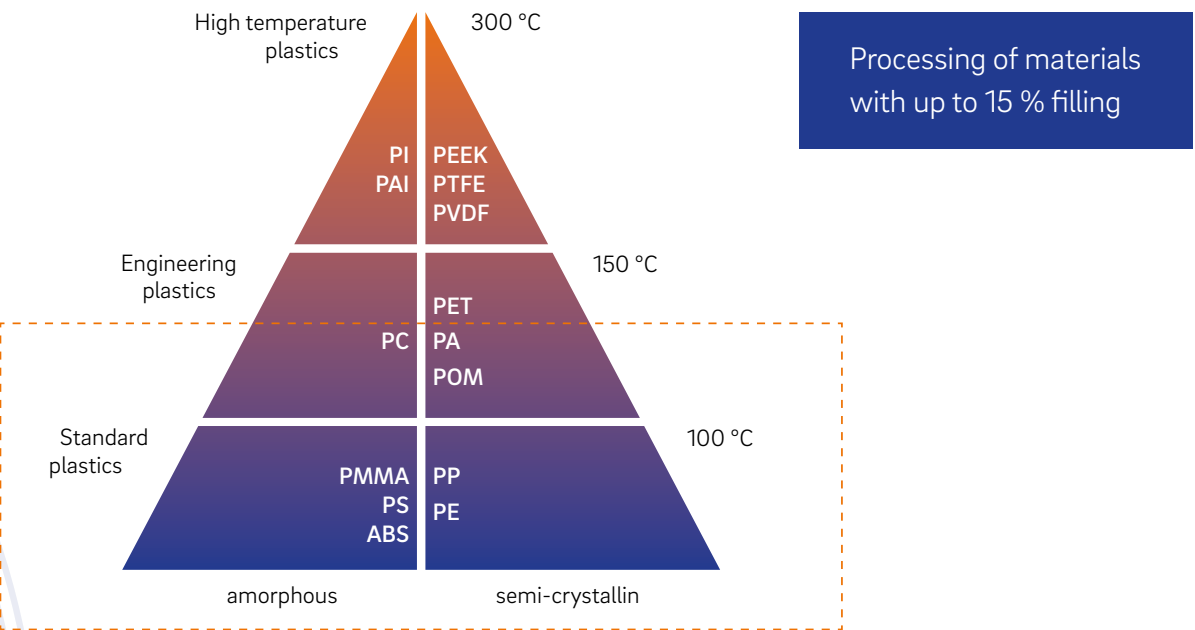


Basic2Connect

- Manifold
- Nozzles
- Cable channel and cable box with housings
- Fully assembled, wired and electrically checked



Basic

- Manifold
- Nozzles

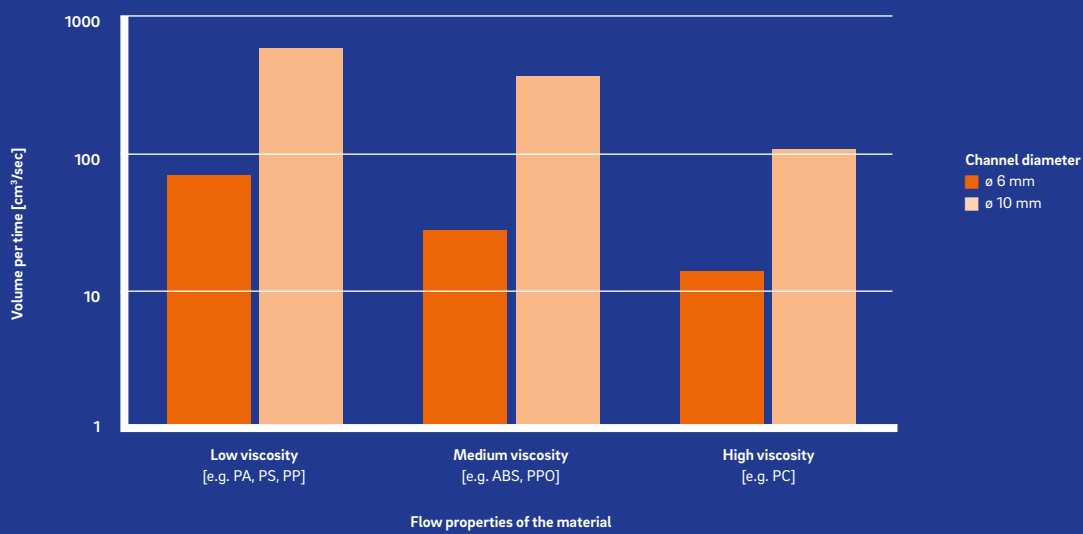

Nozzle length depending on pitches

Nozzle length
80 mm, 120 mm, 150 mm

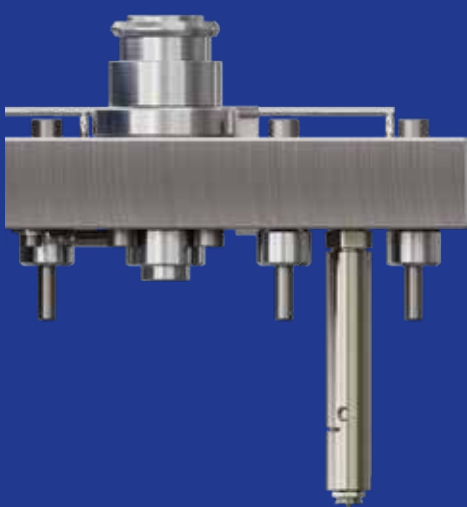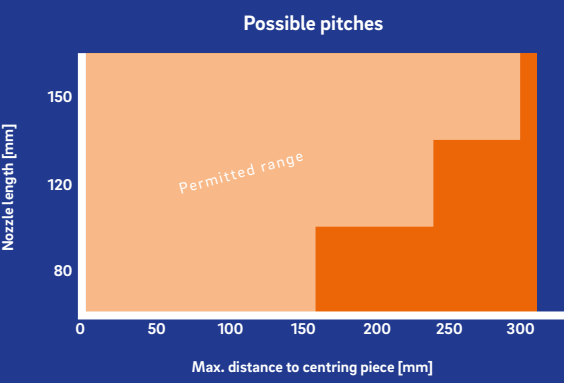

GÜNTHER® BASICLINE

Our service for you:

- Support with project design
- Short delivery time
- Suitable system for your standard requirements
- Flexible pitch dimensions
- Standardised design
- Reliable quality for a wide range of applications

We look forward to advising you:

+49 6451 5008-0
info@guenther-heisskanal.de

A brand from:

GÜNTHER Heisskanaltechnik GmbH
Industriepark Nord | Sachsenberger Strasse 1 | 35066 Frankenberg (Eder), Germany
T +49 6451 5008-0 | info@guenther-heisskanal.de
www.guenther-hotrunner.com

